

→ 简介

/

/

()

→ 技术参数

防爆等级: [Ex ia Ga] IIC

供电电源:

(14+ 15-)


18V DC ~ 60V DC (24V DC)

输入信号类型 (1 2 3):

允许引线电阻: ≤ 20 Ω/

输出信号类型 (7 8 9 10 11 ¹)

C

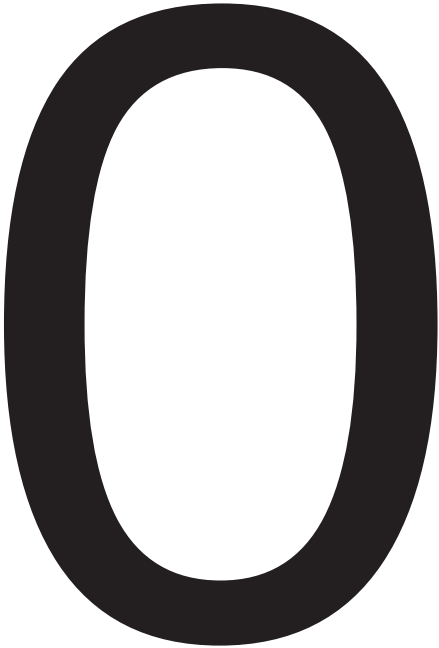

Nanjing New Power Electric Technology Co., Ltd.

		/
IEC 60584-1	K	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	E	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	J	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	T	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	N	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	S	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
	R	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
	B	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
	W5Re-W26Re	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
ASTM E988-96	W3Re-W25Re	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
GOST R8.585	L	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
IEC 60751	Pt100 (α=0.00385)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Pt100 (α=0.00391)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu50 (α=0.00428)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu100 (α=0.00428)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu50 (α=0.00426)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu100 (α=0.00426)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.

→ BUS规格

BUS	
	Max . 8A
(UL/IEC)	1.6kV
	-40°C~-+105°C

➔ 安装

- ☐ DIN IEC 60715 35mm
- ☐

C.

D.

→ 面板显示

- ☐ **PWR:** ()
☐ **ALM:** ()
 LED LED RTD: ()
) LED TC: LED

→ 编程及校准

- ○ ○ ○

→ 注意事项

- ☐ IP20 (
- ☐ IEC/EN 60664-1 2
- ☐ IEC 61000-4
- ☐
- ☐
- ☒ 补充说明
- ☐
- ☐

1).

$$C_o \geq C_p \quad L_o \geq L_p$$

$$2). L_i < L_0 \times 1\% \quad C_0 \geq C_i$$

$$3). C_i < C_0 \times 1\% \quad L_0 \geq L_i$$

○ 4). $L_i \geq L_0 \times 1\%$ $C_i \geq C_0 \times 1\%$ $C_0 \times 50\% \geq 0.6 \mu F$ $L_0 \times$

$$50\% \geq L_i + L_p \quad / \quad A/ \quad B \quad C_o \times 50\% \leq 1 \mu F \quad C$$

$$C_o \times 50\% \leq 0.6 \mu F$$



A. BUS DIN 35

B.

Diagram B shows a central node labeled 'BUS' at the bottom. Two lines extend upwards from this node: one to the left, ending at a node labeled 'DIN', and one to the right, ending at a node labeled 'BUS'.